


EMS AUTOMO SYSTEM



Dash Board

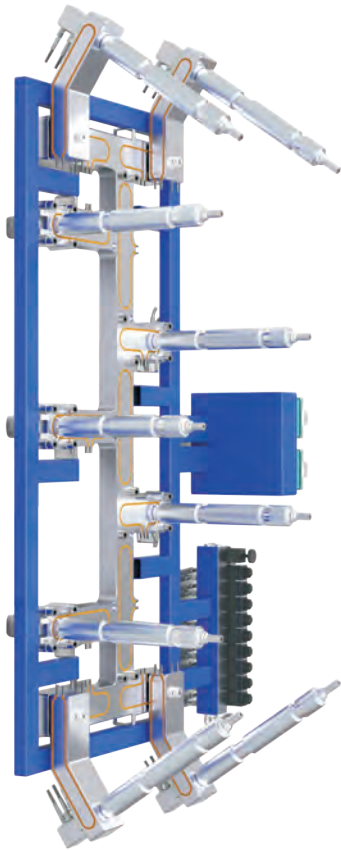

Bumper



Door Panel



Grille



EMS AUTOMO SYSTEM is the prewired hot runner system for the large automotive exterior and interior parts.

EMS AUTOMO SYSTEM 汽车类模具领先预连体式系统, 主要应用于汽车外饰及各大中型内饰件。

Main Features

- Pre-assembled and pre-wired before the delivery.
- Screw-in type nozzle design.
- Special heater design to keep the temperature balance.
- Gate size and the nozzle's length can be customized.
- Plug in design for the spare heater without disassembly.


出厂前完成系统组装和线路连接
 鏢牙式热嘴设计
 独特的热嘴控温设计
 客户可定制热嘴长度和浇口大小
 接头式备用加热器

Main Solutions

- Open & valve system for the applications.
- Convenient mold plate machining.
- Easy installation.
- Easier technical solution for the application.

开放和针阀可供选择
 模具加工简单方便
 安装快捷
 应用条件易满足

EMS AUTOMO SYSTEM

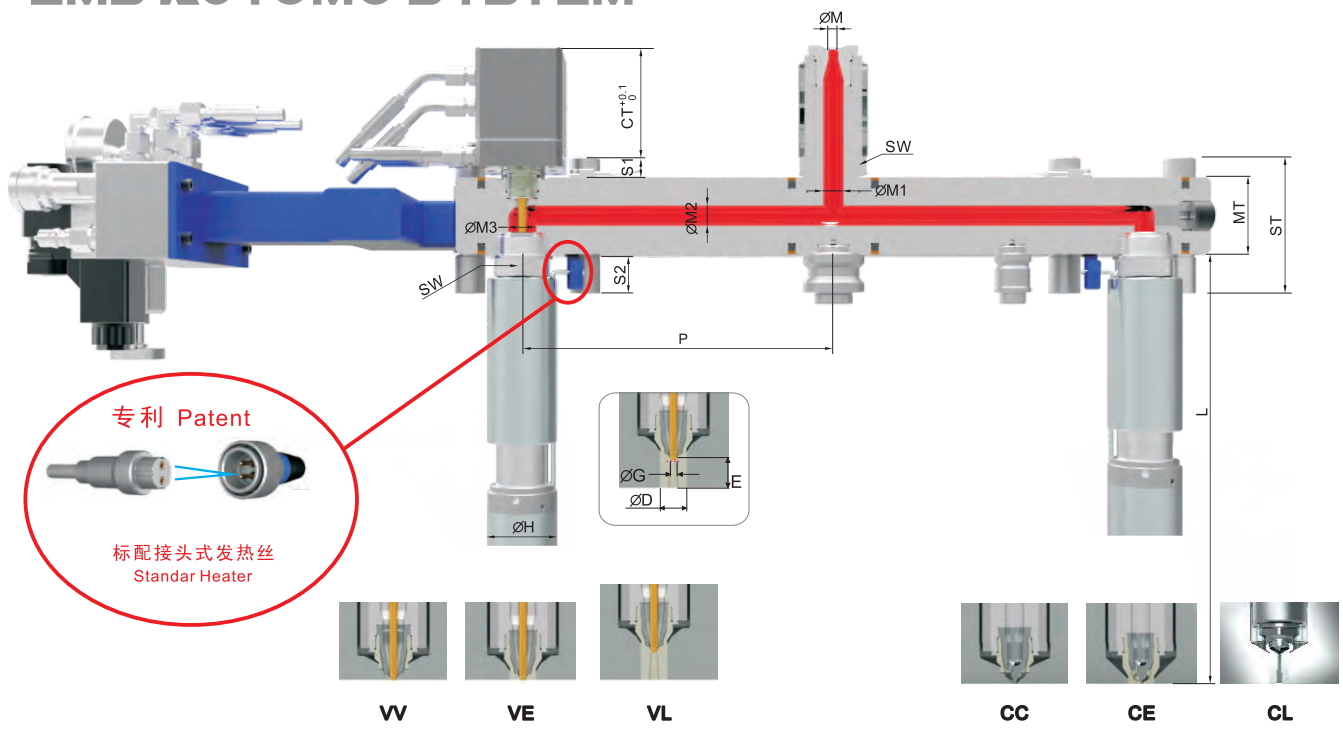

专利 Patent

标配接头式发热丝
Standar Heater

Valve System

Division	EMS25	EMS35	EMS41
Model Number	EMS-25-□□□□	EMS-35-□□□□	EMS-45-□□□□
Injection Volume	Up to 150 gr	Up to 450 gr	Up to 800 gr
CT	70	70	70
ST	105	105	110
MT	55	55	60
ØM	6	8	10
ØM1	10	12	16
ØM2	10	12	16
ØM3	10	12	18/22
S1	20		
S2	30		
SW	26	36	42
E	22.5	25	25
L	70~	80~	90~
ØD	VV	18	25
	VE,VL	14	22
ØG	1.5/2.0/2.5	2.5/3.0/4.0	4.0/5.0/6.0/7.0
ØH	44	54	64

备注/Remark: L ≥ P/2

Open System

Division	EMS25	EMS35	EMS41
Model Number	EMS-25-□□□□	EMS-35-□□□□	EMS-45-□□□□
Injection Volume	Up to 200 gr	Up to 800 gr	Up to 1200 gr
CT	Customer's Specification		
ST	105	105	110
MT	55	55	60
ØM	4	6	8
ØM1	10	12	16
ØM2	10	12	16
ØM3	10	12	16
S1	20		
S2	30		
SW	26	36	42
E	20	25	25
L	70~	80~	90~
ØD	CC,CH	18	25
	CE	14	22
	CL,SL,OL	14	22
ØG	CC,CH,CE	1.2/1.5	2.0/3.0/4.0
	CL	1.5/2.5	3.0/4.0/5.0
	SL,OL	1.5/2.0	2.0/3.0/4.0
ØH	44	54	64

备注/Remark: L ≥ P/2

The Flow Analysis 模流分析

